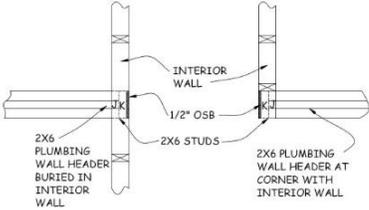




Quick Reference Guide

Jan 2017
Version 2017.0

Chapter 3 - Laying Out Interior Walls

<p>Lay Out Walls on Deck</p>	<ol style="list-style-type: none"> Referring to House Plan, layout location of all interior walls. Snap blue chalk lines on each side. Location of walls labeled "Ref" may not match House Plan owing to foundation differences <ol style="list-style-type: none"> Start by laying out walls around the stairway opening Measure walls that intersect exterior walls from the <u>inside</u> of the exterior walls. At corners and intersections, pay attention to which wall <u>end</u> should abut the <u>side</u> or the other wall. REQUIREMENT: Bath tub/shower MUST be 60 1/8"
<p>Lay Out "Plumbing Walls"</p>	<ol style="list-style-type: none"> Check the house plan for special 2x6 "plumbing" wall (for piping between basement and attic). If 2x6 wall is a simple extension of 2x4 interior wall, lay out with flush side per house plan. If walls intersect at 90° (see figure below): <ol style="list-style-type: none"> If two walls create an "L", butt the side of the 2x6 wall against the end of the 2x4 wall. If the two walls create a "T", extend the 2x6 wall into the 2x4 wall. In both cases, lay out the Jack stud flush with the closet side of the 2x4 wall. Note that 1/2" OSB will be added to the King/Jack pair to match the 3/2" width of the 2x4 wall
<p>Plumbing Wall Configurations</p>	
<p>Door/Wall Intersections</p>	<ol style="list-style-type: none"> At corners, intersections, if a door is to be built at that location, include an "L-Corner" at the end of the adjoining room wall. Allows for easy nailing into the King stud of the door: <div style="text-align: center;">  <p>INTERIOR "L" CORNER</p> </div> Check the house plan for <u>flush sliding</u> closet doors that <u>end</u> at the inside corner of the closet. Similar to plumbing wall, layout end of flush slider with 3/2" sandwich of Jack, King, 1/2" OSB: <div style="text-align: center;">  </div>
<p>Identify Walls of Unusual Height</p>	<ol style="list-style-type: none"> Referring to the House Plan, <ol style="list-style-type: none"> For a 42"-high partition wall, label the <u>deck</u> with "42" WALL/39" STUDS. For a combination of full-height and 42"-height wall, mark the location of the joint between the two sections on the DECK. For any wall at the end of the stairway where a platform will be built, label the DECK with "13-3/4" WALL/7-3/4" STUDS. Before cutting and laying out interior wall plates, lay out ON THE DECK where doors will be located. This insures that any splice in a top plate is not above a door.

Quality Points

Chapter 3 - Laying Out Interior Walls